

# PLSS Monument Preservation Sheet

## Township Range Section Meridian

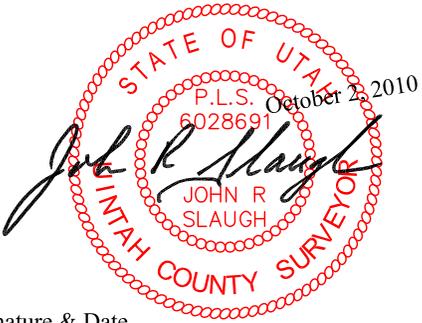


BLM Point ID															Date		10-01-2010					
U	T	2	6	0	0	5	0	S	0	2	2	0	E	0	4	0	0	4	4	0		
Meridian					Township					N S	Range		E W	Section		Corner						
<input checked="" type="checkbox"/> Salt Lake <input type="checkbox"/> Uintah					5					S	2    2		E	1    6		<input type="checkbox"/> NW	<input type="checkbox"/> NE	<input type="checkbox"/> SE	<input type="checkbox"/> SW			
Contact's Name		John R. Slaugh					State		Utah					<input type="checkbox"/> N 1/4	<input checked="" type="checkbox"/> E 1/4	<input type="checkbox"/> S 1/4	<input type="checkbox"/> W 1/4					
Contact's Phone		435-789-1365					County		Uintah					<input type="checkbox"/> WC	<input type="checkbox"/> RC	<input type="checkbox"/> MC	<input type="checkbox"/> Other					
License #		6028691																				
Source Agency		Uintah County																				

## PLSS Monument Coordinates

Datum										NGS National Spacial Reference System Adjustment																				
<input type="checkbox"/> NAD 27			<input type="checkbox"/> NAD 83			<input checked="" type="checkbox"/> WGS 84				<input type="checkbox"/> NAD 83 1986			<input checked="" type="checkbox"/> NAD 83 1994 (OPUS)			<input type="checkbox"/> NAD 83 2007			<input type="checkbox"/> NAD 83 1994 (HARN)											
Latitude (DMS)										Longitude (DMS)																				
N	4	0	-	2	3	-	0	0	.	3	3	9	9	5	W	1	0	9	-	2	6	-	2	8	.	8	6	4	8	9
Northing															Easting															
7	3	1	4	9	9	3	.	9	7						2	2	1	3	8	5	2	.	5	9						
Units <input checked="" type="checkbox"/> Survey Foot <input type="checkbox"/> International Foot <input type="checkbox"/> Meter										Coordinate Type <input checked="" type="checkbox"/> State Plane <input type="checkbox"/> UTM (Zone 12N)																				
Zone <input type="checkbox"/> Utah North <input checked="" type="checkbox"/> Utah central <input type="checkbox"/> Utah South										Vertical datum <input type="checkbox"/> NGVD 29 <input checked="" type="checkbox"/> NAVD 88																				
Ellisode Height    M    4986.50    FT										Elevation    M    5043.25    FT																				

## Monument and Markings

Type/Size			
Stone	Pipe/Cap	Post	Other
Size	Size	Size	Size    3/4" Rebar / 2.5" Cap
Material	Material	Material	Material    Aluminum

Surveyor Seal	Section Location Diagram	Monument Inscription
		
Signature & Date		

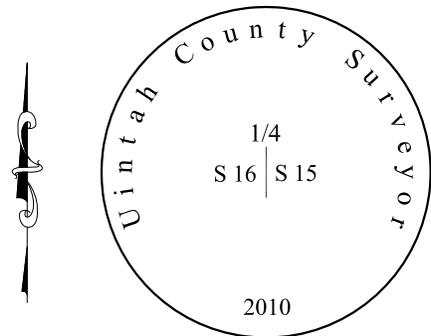
## Description and Observation of Monument

2010 Uintah County Aluminum Cap on 3/4" Rebar 1' East of fence corner. Fence extends South, East and northwesterly from the corner.

Sketch/Rubbing or Attach Photo of GPS Station Occupied  
Show rotation of stampings/markings relative to North and describe briefly

### SURVEYOR'S NARRATIVE OF THE CORNER:

At the 1/4 Corner we found a 1/2" rebar 1' East of a Fence Corner. The rebar was situated at a point near the mid point of a line between the Southeast and Northeast Corners of Section 16. There was no remaining evidence of the 1949 monument. Since the rebar closely matches G.L.O. information and occupation lines, we accepted it as the monument for the 1/4 corner. We removed the 1/2" rebar and replaced it with a 3/4" rebar fitted with a 2.5" 2010 Uintah County Surveyor Aluminum Cap 4" above ground level.



Uintah County Surveyor  
Aluminum Cap on 3/4" rebar